


# 16 – 20 CUYD OPEN SKIPS



## Product Specifications - Single Tipping

**Application:** General / Commercial / Industrial / Recycling

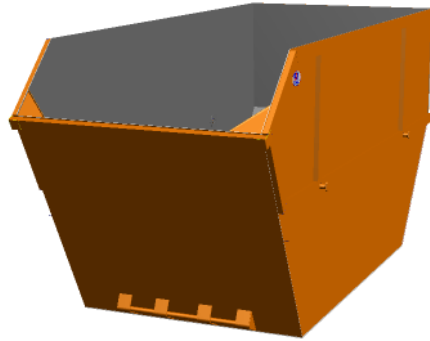

### Details: All Skips

- **Steel** - All prime grade mild steel (HR15 or S275),
- **Construction** - Typically 6mm base, 4mm sides & ends  
All plate seams fully welded on outside and inside.  
Reinforced with channel Double Rails – 16 CUYD PFC 76mm x 38mm (3" x 1.5")  
- 18 & 20 CUYD PFC 100mm x 50mm (4" x 2")  
Diamond Gussets in tipping corners
- **Tipping Bars** - RND35mm dia. assemblies (capped both sides) and fitted at tipping end
- **Lifting Lugs** - Sheppard Meiller type fully welded through both reinforcement channel and side plates
- **GJF Asset No** - Unique number welded inside tipping bar to assist traceability
- **Painting** - One coat primer plus two coats of enamel paint (in colour(s) of your choice)

**Please note a heavy duty version of all these skips is available.**

### Options:

- Custom painting requirements
- Welded customers identification marks
- Laser cut identification plates
- Vinyl graphic sign writing
- Duraflex plastic lids
- RSA40mm x 40mm angle iron chip breakers
- Reflective marker boards (either in RSA13mm angle frames or stick-on type)

### Overall Internal Dimensions:

Size	Drawing No	Length	Width	Height
16 CUYD 12.32 CUM	OS/018	13' 1" 3986mm	5' 9" 1753mm	6' 6 3/4" 2000mm
18 CUYD 13.76 CUM	OS/031	15' 4572mm	6' 1830mm	6' 8 3/4" 2000mm
20 CUYD 10.7 CUM	OS/041	13' 1" 3988mm	6' 1830mm	7' 4" 2235mm

**GJF FABRICATIONS LTD CHASE LINK LICHFIELD ROAD BROWNHILLS WALSALL WS8 6LA**  
Tel 01543 360777 Fax 01543 360977 Email: sales@gjffabrications.co.uk  
Website www.gjffabrications.co.uk