


6 – 8 CUYD OPEN SKIPS



Product Specifications

Application: General / Commercial / Industrial / Construction

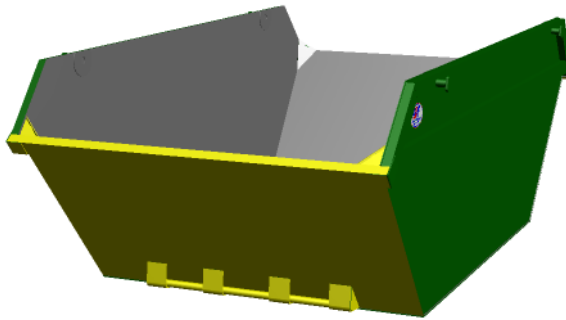

Details: All Skips

- **Steel** - All prime grade mild steel (HR15 or S275),
- **Construction** - Typically 6mm base, 4mm sides & ends
All plate seams fully welded on outside and inside. Reinforced with PFC 76mm x 38mm (3" x 1.5" channel) double rail. Diamond gussets in each corner
- **Tipping Bars** - RND35mm dia. assemblies (capped both sides) and fitted at each end
- **Lifting Lugs** - Sheppard Meiller type fully welded through both reinforcement channel and side plates
- **GJF Asset No** - Unique number welded inside tipping bar to assist traceability
- **Painting** - One coat primer plus two coats of enamel paint (in colour(s) of your choice)

Options:

- Custom painting requirements
- Welded customers identification marks
- Laser cut identification plates
- Vinyl graphic sign writing
- RSA40mm x 40mm angle iron chip breakers
- Reflective marker boards (either in RSA13mm angle frames or stick-on type)

Overall Internal Dimensions:

Size	Drawing No	Length	Width	Height
6 CUYD 4.60 CUM	OS/004, OS/004HD, OS/004CH, OS/004CHLW	10' 11" 3302mm	5'4" 1625mm	3' 3 1/2" 1000mm
6 CUYD 4.60 CUM	OS/006 & OS/006LW	10' 3050mm	5' 6" 1676mm	3' 7 " 1092mm
7 CUYD 5.35 CUM	OS/007 & OS/007LW	10' 8" 3264mm	5' 6" 1676mm	3' 10 1/2" 1220mm
8 CUYD 6.12 CUM	OS/008 & OS/008LW	11' 2" 3404mm	5' 6" 1676mm	4' 1 1/4" 1250mm